



ASTRONERGY


ASTRO N5

CHSM78N(DG)/F-BH
Bifacial Series(182)

610~630W

Warranty

15 15-year Product Warranty **30** 30-year Linear Power Warranty

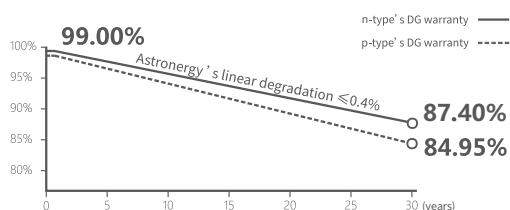

Key Features

- TOPCon / Half-cut
- Low temperature coefficient (Pmpp)
- Non-destructive cutting
- PID resistance
- Low BOS cost & LCOE
- Bifacial gain



ISO 9001:2015:ISO Quality Management System
ISO 14001:2015:ISO Environment Management System
ISO 45001:Occupational Health and Safety
The first solar company which passed the Nord IEC/TS 62941 certification audit



Tier 1
BloombergNEF



610~630W

POWER RANGE

0~+3%

POWER SORTING

22.5%

MAX MODULE
EFFICIENCY

≤ 1.0%

FIRST YEAR
POWER DEGRADATION


≤ 0.4%

YEAR 2-30
POWER DEGRADATION

Mechanical Specifications

Outer dimensions (L x W x H)	2465 x 1134 x 30 mm
Cell type	n-type mono-crystalline
No. of cells	156 (6*26)
Frame technology	Aluminum, silver anodized
Front / Back glass	2.0+2.0 mm
Cable length (Including connector)	Portrait: (+)350 mm, (-)250 mm; Customized length
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
① Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back)
Connector type (IEC/UL)	HCB40 (Standard) / MC4-EVO2A (Optional)
Module weight	34.7 kg
Packing unit	36 pcs / box
Weight of packing unit (for 40'HQ container)	1304 kg
Modules per 40' HQ container	576 pcs (Subject to sales contract)

① Refer to Astronergy crystalline installation manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

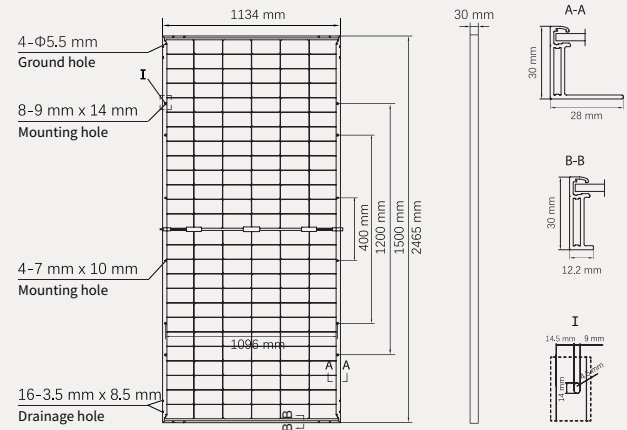

Electrical Specifications

STC: Irradiance 1000W/m², Cell Temperature 25° C, AM=1.5

Rated output (P _{mpp} / Wp)	610	615	620	625	630
Rated voltage (V _{mpp} / V)	45.79	45.96	46.12	46.29	46.45
Rated current (I _{mpp} / A)	13.32	13.38	13.44	13.50	13.56
Open circuit voltage (V _{oc} / V)	55.41	55.61	55.81	56.01	56.21
Short circuit current (I _{sc} / A)	13.87	13.95	14.03	14.11	14.19
Module efficiency	21.8%	22.0%	22.2%	22.4%	22.5%

NMOT: Irradiance 800W/m², Ambient Temperature 20° C, AM=1.5, Wind Speed 1m/s

Rated output (P _{mpp} / Wp)	458.7	462.5	466.2	470.0	473.8
Rated voltage (V _{mpp} / V)	43.10	43.26	43.41	43.57	43.73
Rated current (I _{mpp} / A)	10.64	10.69	10.74	10.79	10.83
Open circuit voltage (V _{oc} / V)	52.63	52.82	53.01	53.20	53.39
Short circuit current (I _{sc} / A)	11.19	11.26	11.32	11.39	11.45

Electrical Specifications (Integrated power)

P _{mpp} gain	P _{mpp} / Wp	V _{mpp} / V	I _{mpp} / A	V _{oc} / V	I _{sc} / A
5%	646	45.96	14.05	55.61	14.64
10%	677	45.96	14.72	55.61	15.34
15%	707	45.97	15.39	55.62	16.03
20%	738	45.97	16.05	55.62	16.73
25%	769	45.97	16.72	55.62	17.43

Electrical characteristics with different rear power gain (reference to 615W)


Temperature Ratings (STC)

Operating Parameters


Temperature coefficient (P _{mpp})	-0.29%/°C	No. of diodes	3
Temperature coefficient (I _{sc})	+0.043%/°C	Junction box IP rating	IP 68
Temperature coefficient (V _{oc})	-0.25%/°C	Max. series fuse rating	30 A
Nominal module operating temperature (NMOT)	41±2°C	Max. system voltage (IEC/UL)	1500V _{DC}

Curve

Current-Voltage (615W)

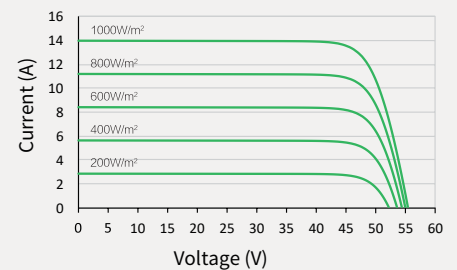

Power-Voltage (615W)

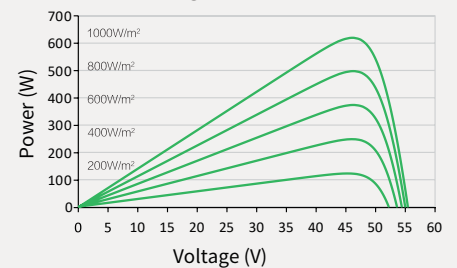

Current-Voltage (615W)

